


XLP POWER CABLE, SHIELDED, 35000 VOLT, TYPE MV-90

SPEC 2-31-9.1

Ver. 7.0

Revised: 09/14/07

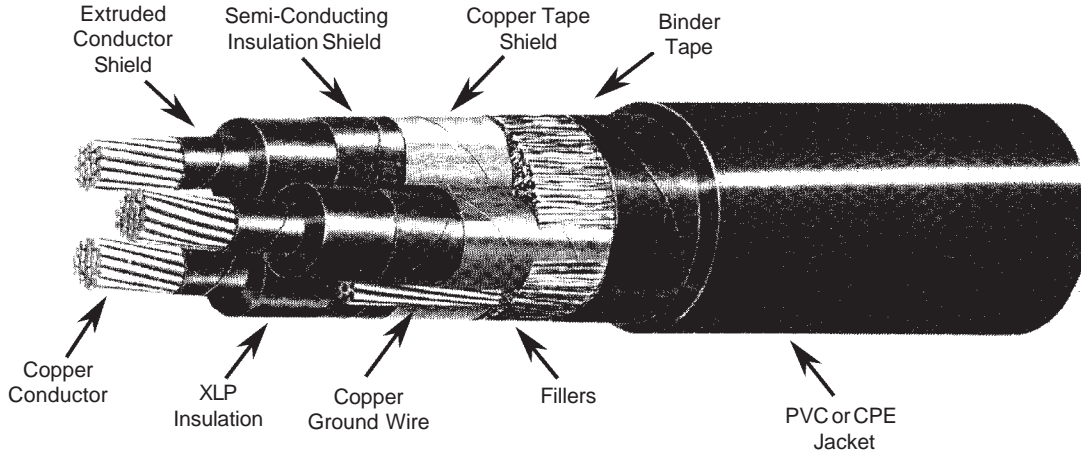

90°C CONDUCTOR TEMPERATURE, WET OR DRY, 100% OR 133% INSULATION LEVEL

Conductor			Insulation in Mils	Overall Jacket in Mils	Size AWG Copper Ground Wire	Approximate O.D. in Inches	Ampacity** 40°C Ambient	Approximate Net Weight LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.						

THREE CONDUCTOR 35000 VOLT SHIELDED, 100% INSULATION LEVEL

1/0	19	0.34	345	140	4	2.91	215	3760
2/0	19	0.38	345	140	4	2.99	245	4150
3/0	19	0.42	345	140	3	3.09	285	4665
4/0	19	0.48	345	140	3	3.21	325	5255
250	37	0.52	345	140	2	3.33	360	5875
350	37	0.62	345	140	2	3.54	435	7155
500	37	0.74	345	140	1	3.84	535	9175
750	61	0.91	345	140	1/0	4.27	670	12360

THREE CONDUCTOR 35000 VOLT SHIELDED, 133% INSULATION LEVEL

1/0	19	0.34	420	140	4	3.25	215	4355
2/0	19	0.38	420	140	4	3.33	245	4760
3/0	19	0.42	420	140	3	3.43	285	5295
4/0	19	0.48	420	140	3	3.55	325	5900
250	37	0.52	420	140	2	3.67	360	6545
350	37	0.62	420	140	2	3.93	435	7975
500	37	0.74	420	140	1	4.18	535	9930

Note: **Based on one three conductor cable isolated in air per NEC. For other installations refer to the NEC.

The above data is approximate and subject to normal manufacturing tolerances.

*Compressed conductors.

STANDARDS AND RATINGS:

1. Listed by UL as Type MV-90 per Standard 1072.
2. Conforms to ICEA S-93-639/NEMA WC74 Shielded Power Cable 5 - 46KV.
3. Listed by UL as Sunlight Resistant, for Direct Burial and For CT Use.
4. Listed by CSA as Type Power Cable per Standard CSA C68.3 (with -40°C PVC jacket).

AETNA INSULATED WIRE, INC.
 1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455
 TELEPHONE: (800) 423-6505 FAX: (757) 605-2094
 WWW.AETNAWIRE.COM



