


**UNDERGROUND DISTRIBUTION POWER CABLE (UD\URD), 15000 VOLT
CROSS-LINKED POLYETHYLENE INSULATION (XLP),
AEIC CS8¹**

SPEC 2-71-2
Ver. 7.1
Revised: 12/16/08

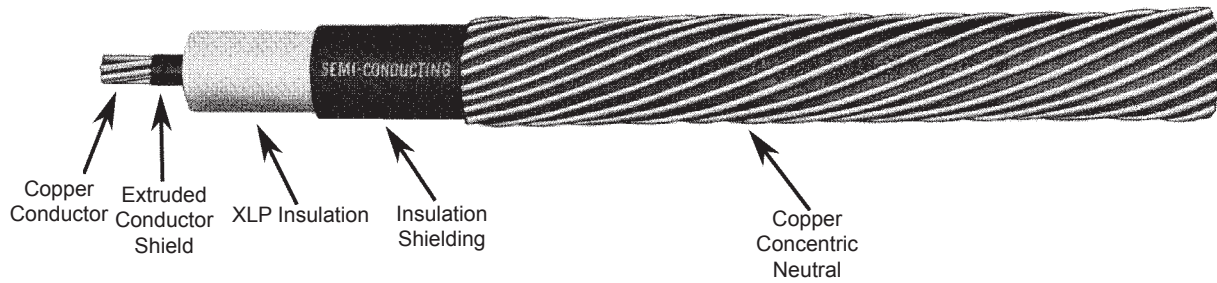

90°C CONDUCTOR TEMPERATURE, WET OR DRY, 100% OR 133% INSULATION LEVEL

Conductor			Insulation in Mils	Insulation Shielding in Mils	Concentric Neutral Full No. x Size AWG	Concentric Neutral 1/3rd No. x Size AWG	Approximate O.D. F/N in Inches	Ampacity** 20°C Ambient Earth	Approximate Net Weight Full Neutral LBS/KFT	Approximate Net Weight 1/3rd Neutral LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.								

COPPER CONDUCTOR, 15000 VOLT, 100% INSULATION LEVEL

2	7	0.27	175	30	16 x 14	6 x 14	0.87	155	555	425
1*	19	0.32	175	30	13 x 12	7 x 14	0.95	175	690	510
1/0	19	0.34	175	30	16 x 12	9 x 14	0.97	200	820	605
2/0	19	0.38	175	30	13 x 10	11 x 14	1.05	230	1012	725
3/0	19	0.42	175	30	16 x 10	14 x 14	1.10	260	1231	885
4/0	19	0.48	175	30	20 x 10	18 x 14	1.15	295	1512	1090
250	37	0.52	175	30	15 x 8	13 x 12	1.26	325	1781	1265
350	37	0.62	175	40	----	18 x 12	1.28 ⁻	390	----	1720
500	37	0.74	175	40	----	17 x 10	1.44 ⁻	465	----	2405
750	61	0.91	175	40	----	16 x 8	1.69 ⁻	565	----	3520

COPPER CONDUCTOR, 15000 VOLT, 133% INSULATION LEVEL

2	7	0.27	220	30	16 x 14	6 x 14	0.96	155	600	470
1*	19	0.32	220	30	13 x 12	7 x 14	1.05	175	735	555
1/0	19	0.34	220	30	16 x 12	9 x 14	1.06	200	865	650
2/0	19	0.38	220	30	13 x 10	11 x 14	1.15	230	1060	775
3/0	19	0.42	220	30	16 x 10	14 x 14	1.19	260	1285	940
4/0	19	0.48	220	30	20 x 10	18 x 14	1.25	295	1570	1145
250	37	0.52	220	40	15 x 8	13 x 12	1.37	325	1855	1340
350	37	0.62	220	40	----	18 x 12	1.38 ⁻	390	----	1785
500	37	0.74	220	40	----	17 x 10	1.54 ⁻	465	----	2475
750	61	0.91	220	40	----	16 x 8	1.78 ⁻	565	----	3600

Note: **Based on three cables in an underground duct, single circuit, earth 20°C, 100% load factor, RHO 90 per NEC, conductor temperature 90°C. No neutral current is considered.

*Compressed conductors.

¹If specified at time of order.

⁻Approximate O.D. in Inches for 1/3rd Concentric Neutrals.

The above data is approximate and subject to normal manufacturing tolerances.

STANDARDS AND RATINGS:

1. Conforms to ANSI/ICEA S-94-649 Concentric Neutral Cables Rated 5-46 kV.
2. Conforms to AEIC CS8 upon request.
3. Listed by CSA as Type Power Cable per Standard CSA C68.3.

AETNA INSULATED WIRE, INC.
1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455
TELEPHONE: (800) 423-6505 FAX: (757) 605-2094
WWW.AETNAWIRE.COM

