


**UNDERGROUND DISTRIBUTION POWER CABLE (UD\URD),
25000/28000 VOLT OR 35000 VOLT, CROSS-LINKED POLYETHYLENE
INSULATION (XLP), AEIC CS8¹**

SPEC 2-71-5
Ver. 7.0
Revised: 06/18/08

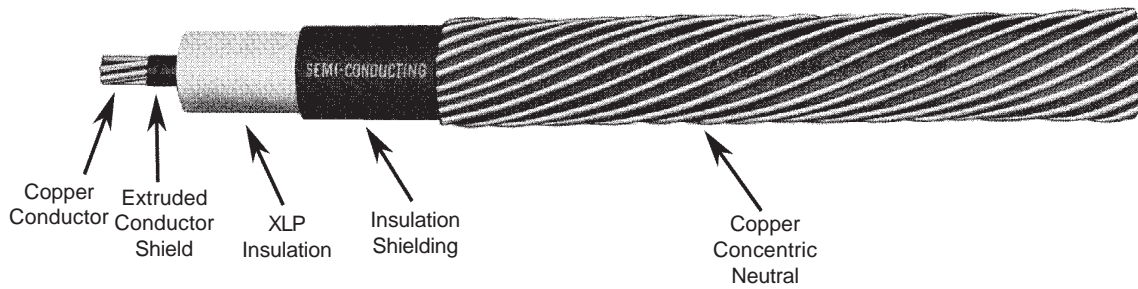

90°C CONDUCTOR TEMPERATURE, WET OR DRY, 100% OR 133% INSULATION LEVEL

Conductor			Insulation in Mils	Insulation Shielding in Mils	Concentric Neutral Full No. x Size AWG	Concentric Neutral 1/3rd No. x Size AWG	Approximate O.D. F/N in Inches	Ampacity** 20°C Ambient Earth	Approximate Net Weight Full Neutral LBS/KFT	Approximate Net Weight 1/3rd Neutral LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.								

COPPER CONDUCTOR, 25000/28000 VOLT 133% OR 35000 VOLT 100% INSULATION LEVEL

1*	19	0.32	345	40	13 x 12	7 x 14	1.33	175	910	730
1/0	19	0.34	345	40	16 x 12	9 x 14	1.35	200	1045	830
2/0	19	0.38	345	40	13 x 10	11 x 14	1.43	230	1250	965
3/0	19	0.42	345	40	16 x 10	14 x 14	1.48	260	1480	1135
4/0	19	0.48	345	40	20 x 10	18 x 14	1.53	295	1770	1345
250	37	0.52	345	40	15 x 8	13 x 12	1.64	325	2055	1540
350	37	0.62	345	40	----	18 x 12	1.64 ⁻	390	----	1995
500	37	0.74	345	50	----	17 x 10	1.83 ⁻	465	----	2745
750	61	0.91	345	50	----	16 x 8	2.08 ⁻	565	----	3905

COPPER CONDUCTOR, 35000 VOLT, 133% INSULATION LEVEL

1/0	19	0.34	420	40	16 x 12	9 x 14	1.51	200	1165	950
2/0	19	0.38	420	40	13 x 10	11 x 14	1.59	230	1370	1085
3/0	19	0.42	420	40	16 x 10	14 x 14	1.63	260	1605	1260
4/0	19	0.48	420	40	20 x 10	18 x 14	1.69	295	1900	1475
250	19	0.52	420	40	15 x 8	13 x 12	1.79	325	----	1675
350	37	0.62	420	50	----	18 x 12	1.83 ⁻	390	----	2180
500	37	0.74	420	50	----	17 x 10	1.99 ⁻	465	----	2905

Note: **Based on three cables in an underground duct, single circuit, earth 20°C, 100% load factor, RHO 90 per NEC, conductor temperature 90°C. No neutral current is considered.

The above data is approximate and subject to normal manufacturing tolerances.

*Compressed conductors.

¹If specified at time of order.

⁻Approximate O.D. in Inches for 1/3rd Concentric Neutrals.

STANDARDS AND RATINGS:

1. Conforms to ANSI/ICEA S-94-649 Concentric Neutral Cables Rated 5-46 kV.
2. Conforms to AEIC CS8 upon request.
3. Listed by CSA as Type Power Cable per Standard CSA C68.3.

AETNA INSULATED WIRE, INC.
1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455
TELEPHONE: (800) 423-6505 FAX: (757) 605-2094
WWW.AETNAWIRE.COM

