


**UNDERGROUND DISTRIBUTION POWER CABLE (UD\URD), 35000V SPEC2-71-6.1**  
**CROSS-LINKED POLYETHYLENE INSULATION (XLP),**  
**OVERALL JACKET, AEIC CS8<sup>1</sup>**

Ver. 7.0  
 Revised: 08/17/07

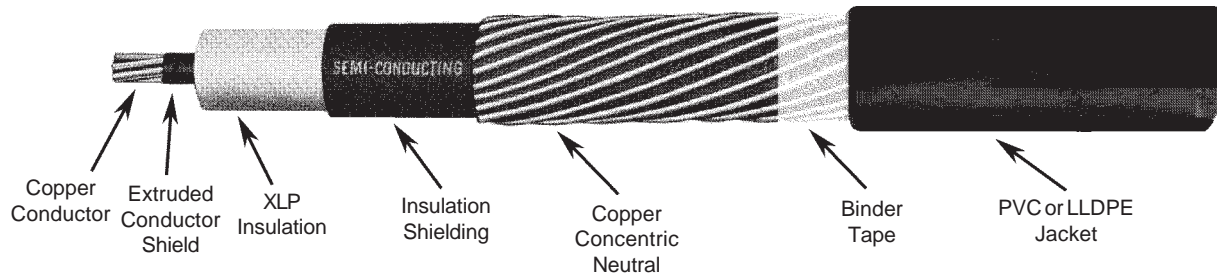

**90°C CONDUCTOR TEMPERATURE, WET OR DRY**

Conductor			Insulation in Mils	Insulation Shielding in Mils	Overall Jacket in Mils	Concentric Neutral Full No. x Size AWG	Concentric Neutral 1/3rd No. x Size AWG	Approximate O.D. F/N in Inches	Ampacity** 20°C Ambient Earth	Approximate Net Weight Full Neutral LBS/KFT	Approximate Net Weight 1/3rd Neutral LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.									

**COPPER CONDUCTOR, 35000 VOLT, 100% INSULATION LEVEL**

1/0	19	0.34	345	40	80	16 x 12	9 x 14	1.55	200	1275	1055
2/0	19	0.38	345	40	80	13 x 10	11 x 14	1.63	230	1499	1195
3/0	19	0.42	345	40	80	16 x 10	14 x 14	1.68	260	1730	1370
4/0	19	0.48	345	40	110	20 x 10	18 x 14	1.79	295	2130	1595
250	37	0.52	345	40	110	15 x 8	13 x 12	1.90	325	2430	1895
350	37	0.62	345	40	110	----	18 x 12	1.90 <sup>-</sup>	390	----	2380
500	37	0.74	345	50	110	----	17 x 10	2.10 <sup>-</sup>	465	----	3170
750	61	0.91	345	50	110	----	16 x 8	2.35 <sup>-</sup>	565	----	4385

**COPPER CONDUCTOR, 35000 VOLT, 133% INSULATION LEVEL**

1/0	19	0.34	420	40	80	16 x 12	9 x 14	1.71	200	1429	1195
2/0	19	0.38	420	40	110	13 x 10	11 x 14	1.85	230	1740	1440
3/0	19	0.42	420	40	110	16 x 10	14 x 14	1.90	260	1985	1625
4/0	19	0.48	420	40	110	20 x 10	18 x 14	1.95	295	2295	1855
250	37	0.52	420	40	110	15 x 8	13 x 12	2.06	325	2600	2065
350	37	0.62	420	50	110	----	18 x 12	2.09 <sup>-</sup>	390	----	2605
500	37	0.74	420	50	110	----	17 x 10	2.26 <sup>-</sup>	465	----	3365

**Note:** \*\*Based on three cables in an underground duct, single circuit, earth 20°C, 100% load factor, RHO 90 per NEC, conductor temperature 90°C. No neutral current is considered.

<sup>1</sup>If specified at time of order.

<sup>-</sup>Approximate O.D. in Inches for 1/3<sup>rd</sup> Concentric Neutrals.

The above data is approximate and subject to normal manufacturing tolerances.

**STANDARDS AND RATINGS:**

1. Conforms to ANSI/ICEA S-94-649 Concentric Neutral Cables Rated 5-46 kV.
2. Conforms to AEIC CS8 upon request.
3. Listed by CSA as Type Power Cable per Standard CSA C68.3 (with -40°C PVC jacket).

AETNA INSULATED WIRE, INC.  
 1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455  
 TELEPHONE: (800) 423-6505 FAX: (757) 605-2094  
 WWW.AETNAWIRE.COM

