


**UNDERGROUND DISTRIBUTION POWER CABLE (UD\URD), 15000 VOLT
ETHYLENE-PROPYLENE RUBBER INSULATION (EPR),
AEIC CS8¹**

SPEC 2-81-2
Ver. 7.1
Revised: 12/17/08

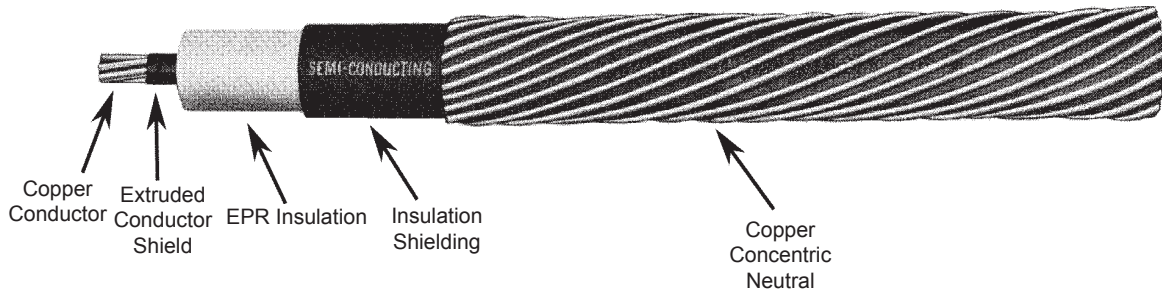

90°/105°C CONDUCTOR TEMPERATURE, WET OR DRY

Conductor			Insulation in Mils	Insulation Shielding in Mils	Concentric Neutral Full No. x Size AWG	Concentric Neutral 1/3rd No. x Size AWG	Approximate O.D. F/N in Inches	Ampacity** 20°C Ambient Earth	Approximate Net Weight Full Neutral LBS/KFT	Approximate Net Weight 1/3rd Neutral LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.								

COPPER CONDUCTOR, 15000 VOLT, 100% INSULATION LEVEL

2	7	0.27	175	30	16 x 14	6 x 14	0.87	155	585	460
1*	19	0.32	175	30	13 x 12	7 x 14	0.95	175	725	545
1/0	19	0.34	175	30	16 x 12	9 x 14	0.97	200	855	640
2/0	19	0.38	175	30	13 x 10	11 x 14	1.05	230	1050	765
3/0	19	0.42	175	30	16 x 10	14 x 14	1.10	260	1270	930
4/0	19	0.48	175	30	20 x 10	18 x 14	1.15	295	1560	1130
250	37	0.52	175	30	15 x 8	13 x 12	1.26	325	1830	1310
350	37	0.62	175	40	----	18 x 12	1.28 ⁻	390	----	1770
500	37	0.74	175	40	----	17 x 10	1.44 ⁻	465	----	2466
750	61	0.91	175	40	----	16 x 8	1.69 ⁻	565	----	3590

COPPER CONDUCTOR, 15000 VOLT, 133% INSULATION LEVEL

2*	7	0.27	220	30	16 x 14	6 x 14	0.96	155	640	510
1	19	0.32	220	30	13 x 12	7 x 14	1.05	175	785	605
1/0	19	0.34	220	30	16 x 12	9 x 14	1.06	200	915	700
2/0	19	0.38	220	30	13 x 10	11 x 14	1.15	230	1115	830
3/0	19	0.42	220	30	16 x 10	14 x 14	1.19	260	1340	995
4/0	19	0.48	220	30	20 x 10	18 x 14	1.25	295	1630	1205
250	37	0.52	220	40	15 x 8	13 x 12	1.37	325	1920	1405
350	37	0.62	220	40	----	18 x 12	1.38 ⁻	390	----	1855
500	37	0.74	220	40	----	17 x 10	1.54 ⁻	465	----	2560
750	61	0.91	220	40	----	16 x 8	1.78 ⁻	565	----	3695

Note: **Based on three cables in an underground duct, single circuit, earth 20°C, 100% load factor, RHO 90 per NEC, conductor temperature 90°C. No neutral current is considered.

The above data is approximate and subject to normal manufacturing tolerances.

*Compressed conductors.

¹If specified at time of order.

⁻Approximate O.D. in Inches for 1/3rd Concentric Neutrals.

STANDARDS AND RATINGS:

1. Conforms to ANSI/ICEA S-94-649 Concentric Neutral Cables Rated 5-46 kV.
2. Conforms to AEIC CS8 upon request.
3. Listed by CSA as Type Power Cable per Standard CSA C68.3.

AETNA INSULATED WIRE, INC.
1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455
TELEPHONE: (800) 423-6505 FAX: (757) 605-2094
WWW.AETNAWIRE.COM

