


**TECK HIGH VOLTAGE (MINUS 40°C) HL ARMORED POWER CABLE,  
25000/28000 VOLT OR 35000 VOLT XLP, SHIELDED**

**SPEC 8-39-8**  
Ver. 7.0  
Revised: 06/20/08

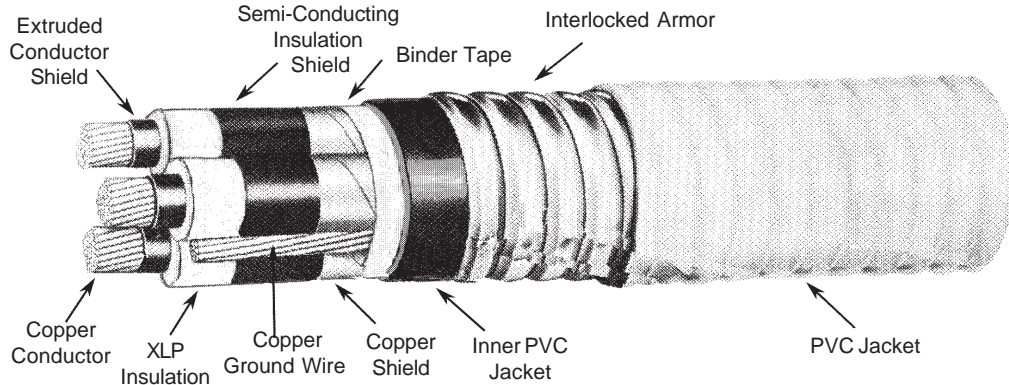

**90°C CONDUCTOR TEMPERATURE, WET OR DRY, 100% OR 133% INSULATION LEVEL**

Conductor			Insulation in Mils	Inner Jacket in Mils	Size AWG Copper Ground Wire	Approximate O.D. in Inches		Ampacity** 40°C Ambient	Approximate Net Weight~ LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.				Over Armor	Over Overall Jacket		

**THREE CONDUCTOR 25000/28000 VOLT 133% OR 35000 VOLT 100% INSULATION LEVEL**

1*	19	0.32	345	110	6	3.23	3.40	185	4735
1/0	19	0.34	345	140	6	3.26	3.43	215	5005
2/0	19	0.38	345	140	6	3.34	3.51	245	5430
3/0	19	0.42	345	140	4	3.44	3.61	285	6005
4/0	19	0.48	345	140	4	3.56	3.73	325	6640
250	37	0.52	345	140	4	3.68	3.85	360	7270
350	37	0.62	345	140	3	3.89	4.06	435	8670
500	37	0.74	345	140	2	4.19	4.36	535	10805

**THREE CONDUCTOR 35000 VOLT, SHIELDED, 133% INSULATION LEVEL**

1/0	19	0.34	420	140	6	3.60	3.77	215	5740
2/0	19	0.38	420	140	6	3.68	3.85	245	6180
3/0	19	0.42	420	140	4	3.78	3.95	285	6775
4/0	19	0.48	420	140	4	3.90	4.07	325	7430
250	37	0.52	420	140	4	4.02	4.19	360	8080
350	37	0.62	420	140	3	4.28	4.45	435	9655

**Note:** \*\*Based on single cable isolated in air. For other installations refer to the CEC.

-Weights based on aluminum armor assembly.

\*Compressed conductors.

The above data is approximate and subject to normal manufacturing tolerances.

**STANDARDS AND RATINGS:**

1. Listed as Type Power Cable by CSA per CSA 68.3.
2. Listed as FT4 & HL by CSA per CSA C22.2 No. 174.
3. Conforms to ICEA S-93-639/NEMA WC74 Shielded Power Cables 5 - 46KV.

AETNA INSULATED WIRE, INC.  
1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455  
TELEPHONE: (800) 423-6505 FAX: (757) 605-2094  
WWW.AETNAWIRE.COM

