


# TECK HIGH VOLTAGE (MINUS 40°C) HL ARMORED POWER CABLE, 35000 VOLT XLP, SHIELDED

**SPEC 8-39-9**

Ver. 7.0

Revised: 06/05/06

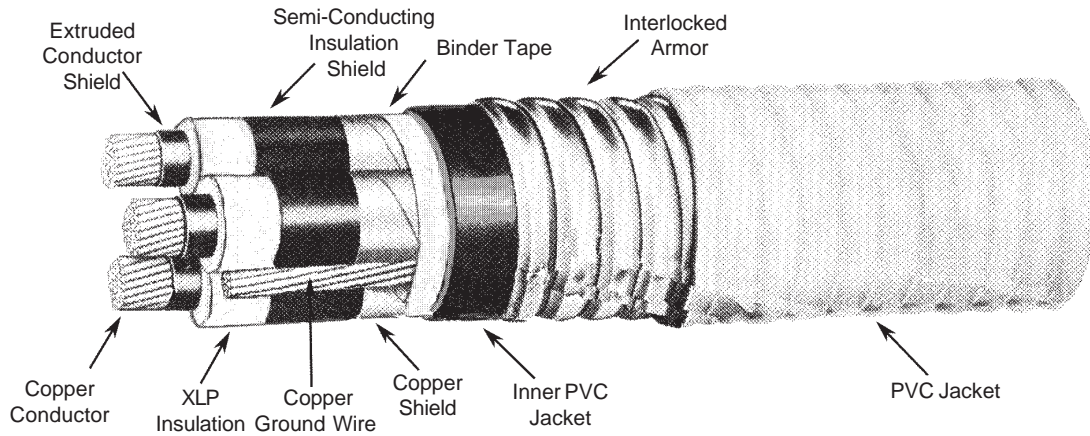

## 90°C CONDUCTOR TEMPERATURE, WET OR DRY, 100% OR 133% INSULATION LEVEL

Conductor			Insulation in Mils	Inner Jacket in Mils	Size AWG Copper Ground Wire	Approximate O.D. in Inches		Ampacity** 40°C Ambient	Approximate Net Weight~ LBS/KFT
Size AWG or KCMIL	No. of Strands	Nominal O.D.				Over Armor	Over Overall Jacket		

### THREE CONDUCTOR 35000 VOLT, SHIELDED, 100% INSULATION LEVEL

1/0	19	0.34	345	140	6	3.26	3.43	215	5005
2/0	19	0.38	345	140	6	3.34	3.51	245	5430
3/0	19	0.42	345	140	4	3.44	3.61	285	6005
4/0	19	0.48	345	140	4	3.56	3.73	325	6640
250	37	0.52	345	140	4	3.68	3.85	360	7270
350	37	0.62	345	140	3	3.89	4.06	435	8670
500	37	0.74	345	140	2	4.19	4.36	535	10805

### THREE CONDUCTOR 35000 VOLT, SHIELDED, 133% INSULATION LEVEL

1/0	19	0.34	420	140	6	3.60	3.77	215	5740
2/0	19	0.38	420	140	6	3.68	3.85	245	6180
3/0	19	0.42	420	140	4	3.78	3.95	285	6775
4/0	19	0.48	420	140	4	3.90	4.07	325	7430
250	37	0.52	420	140	4	4.02	4.19	360	8080
350	37	0.62	420	140	3	4.28	4.45	435	9655

**Note:** \*\*Based on single cable isolated in air. For other installations refer to the CEC.

~Weights based on aluminum armor assembly.

The above data is approximate and subject to normal manufacturing tolerances.

## STANDARDS AND RATINGS:

1. Listed as Type Power Cable by CSA per CSA 68.3.
2. Listed as FT4 & HL by CSA per CSA C22.2 No. 174.
3. Conforms to ICEA S-93-639/NEMA WC74 Shielded Power Cables 5 - 46KV.

AETNA INSULATED WIRE COMPANY  
1537 AIR RAIL AVENUE, VIRGINIA BEACH, VA 23455  
TELEPHONE: (800) 423-6505 FAX: (757) 605-2094  
WWW.AETNAWIRE.COM

